


NOTES:

1) ALL DIODES 1N4148 UNLESS MARKED

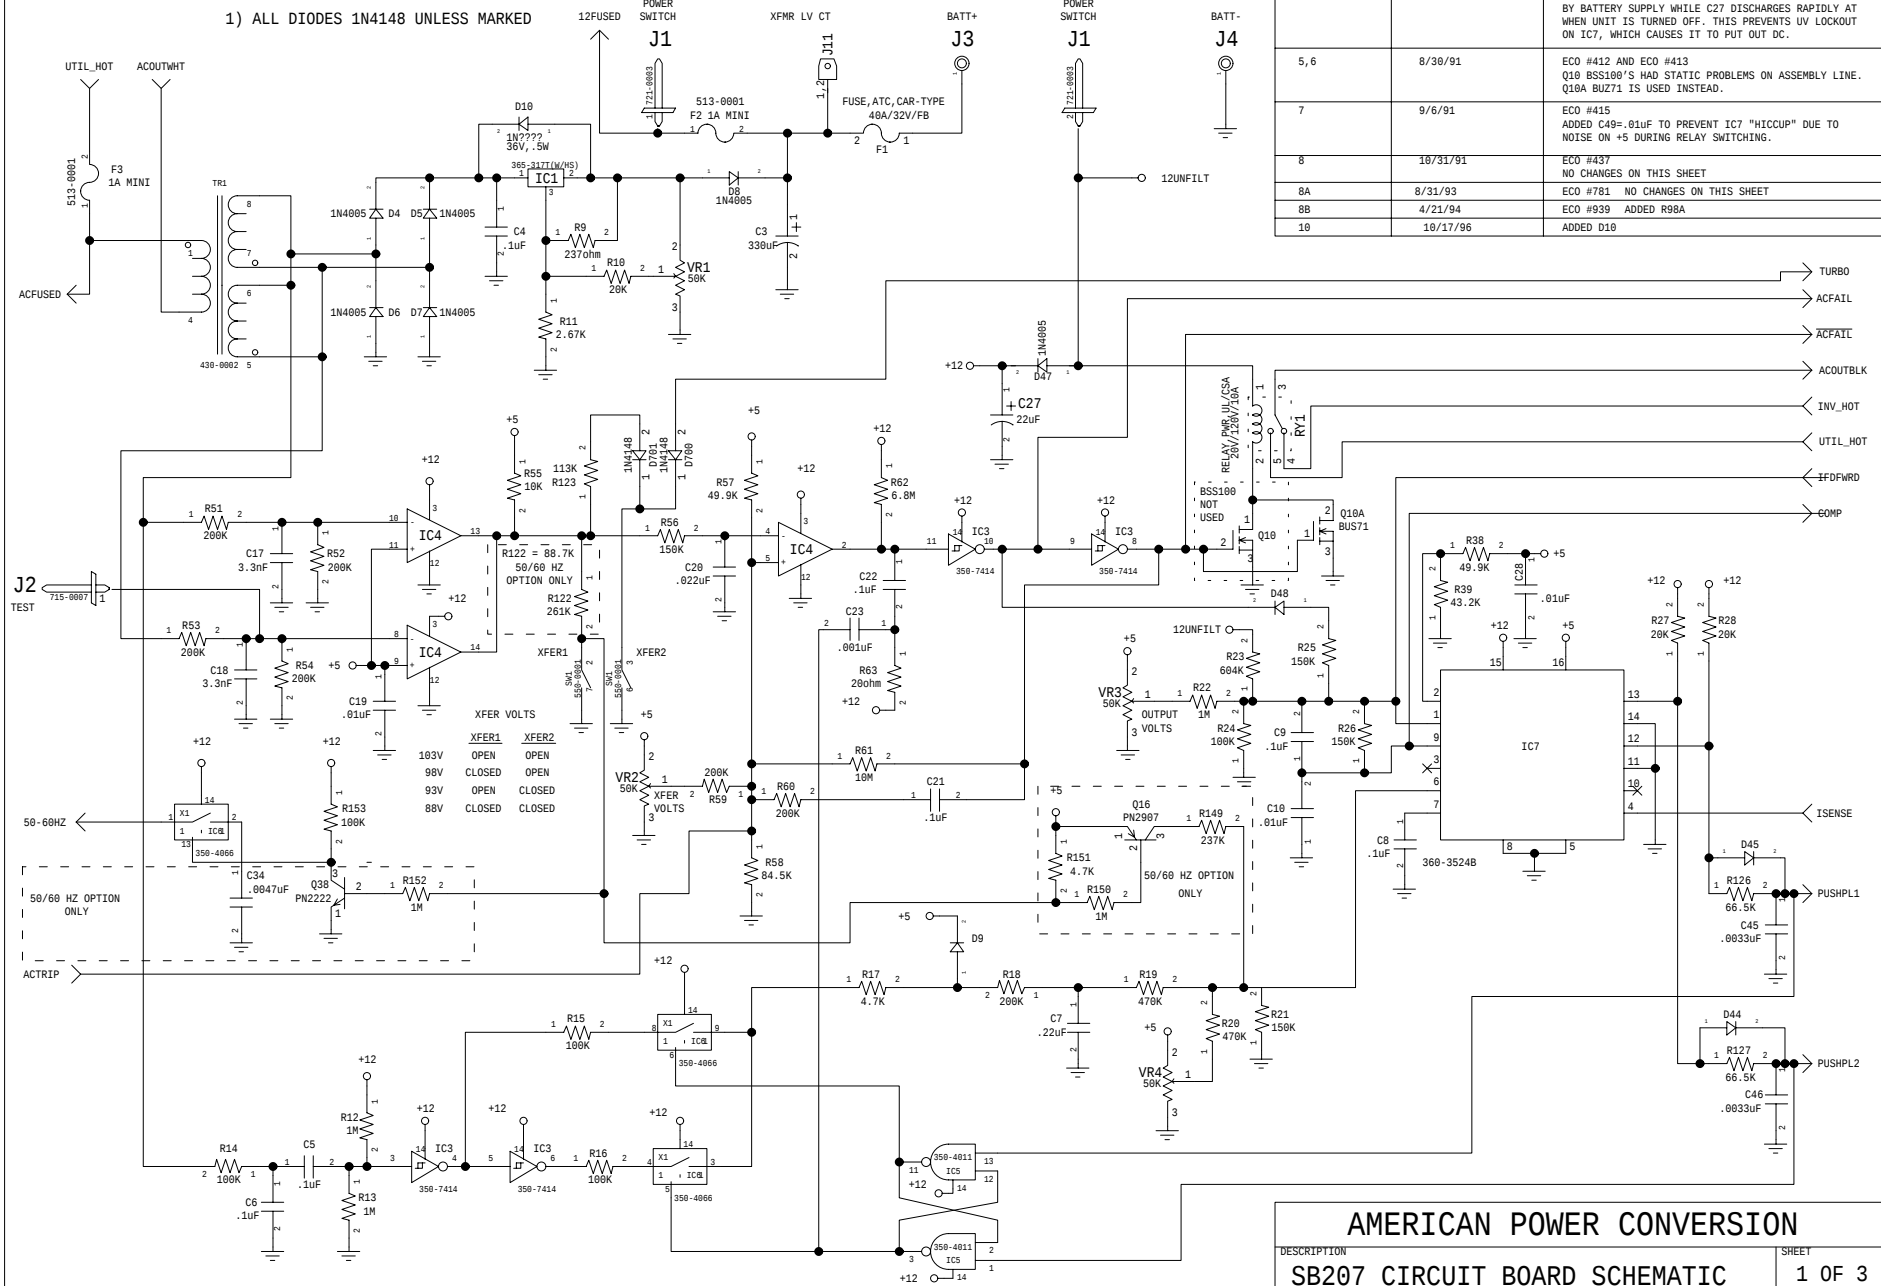


AMERICAN POWER CONVERSION

DESCRIPTION		SHEET	
SB207 CIRCUIT BOARD SCHEMATIC		1 OF 3	
PRODUCT		APCC PART #	
MINI 250/400 BACK-UPS		OS-207	
DATE	BY	SCALE	DWG
3/15/91	ESM		640-0207D
		REV	10

NOTES:

1) ALL DIODES 1N4148

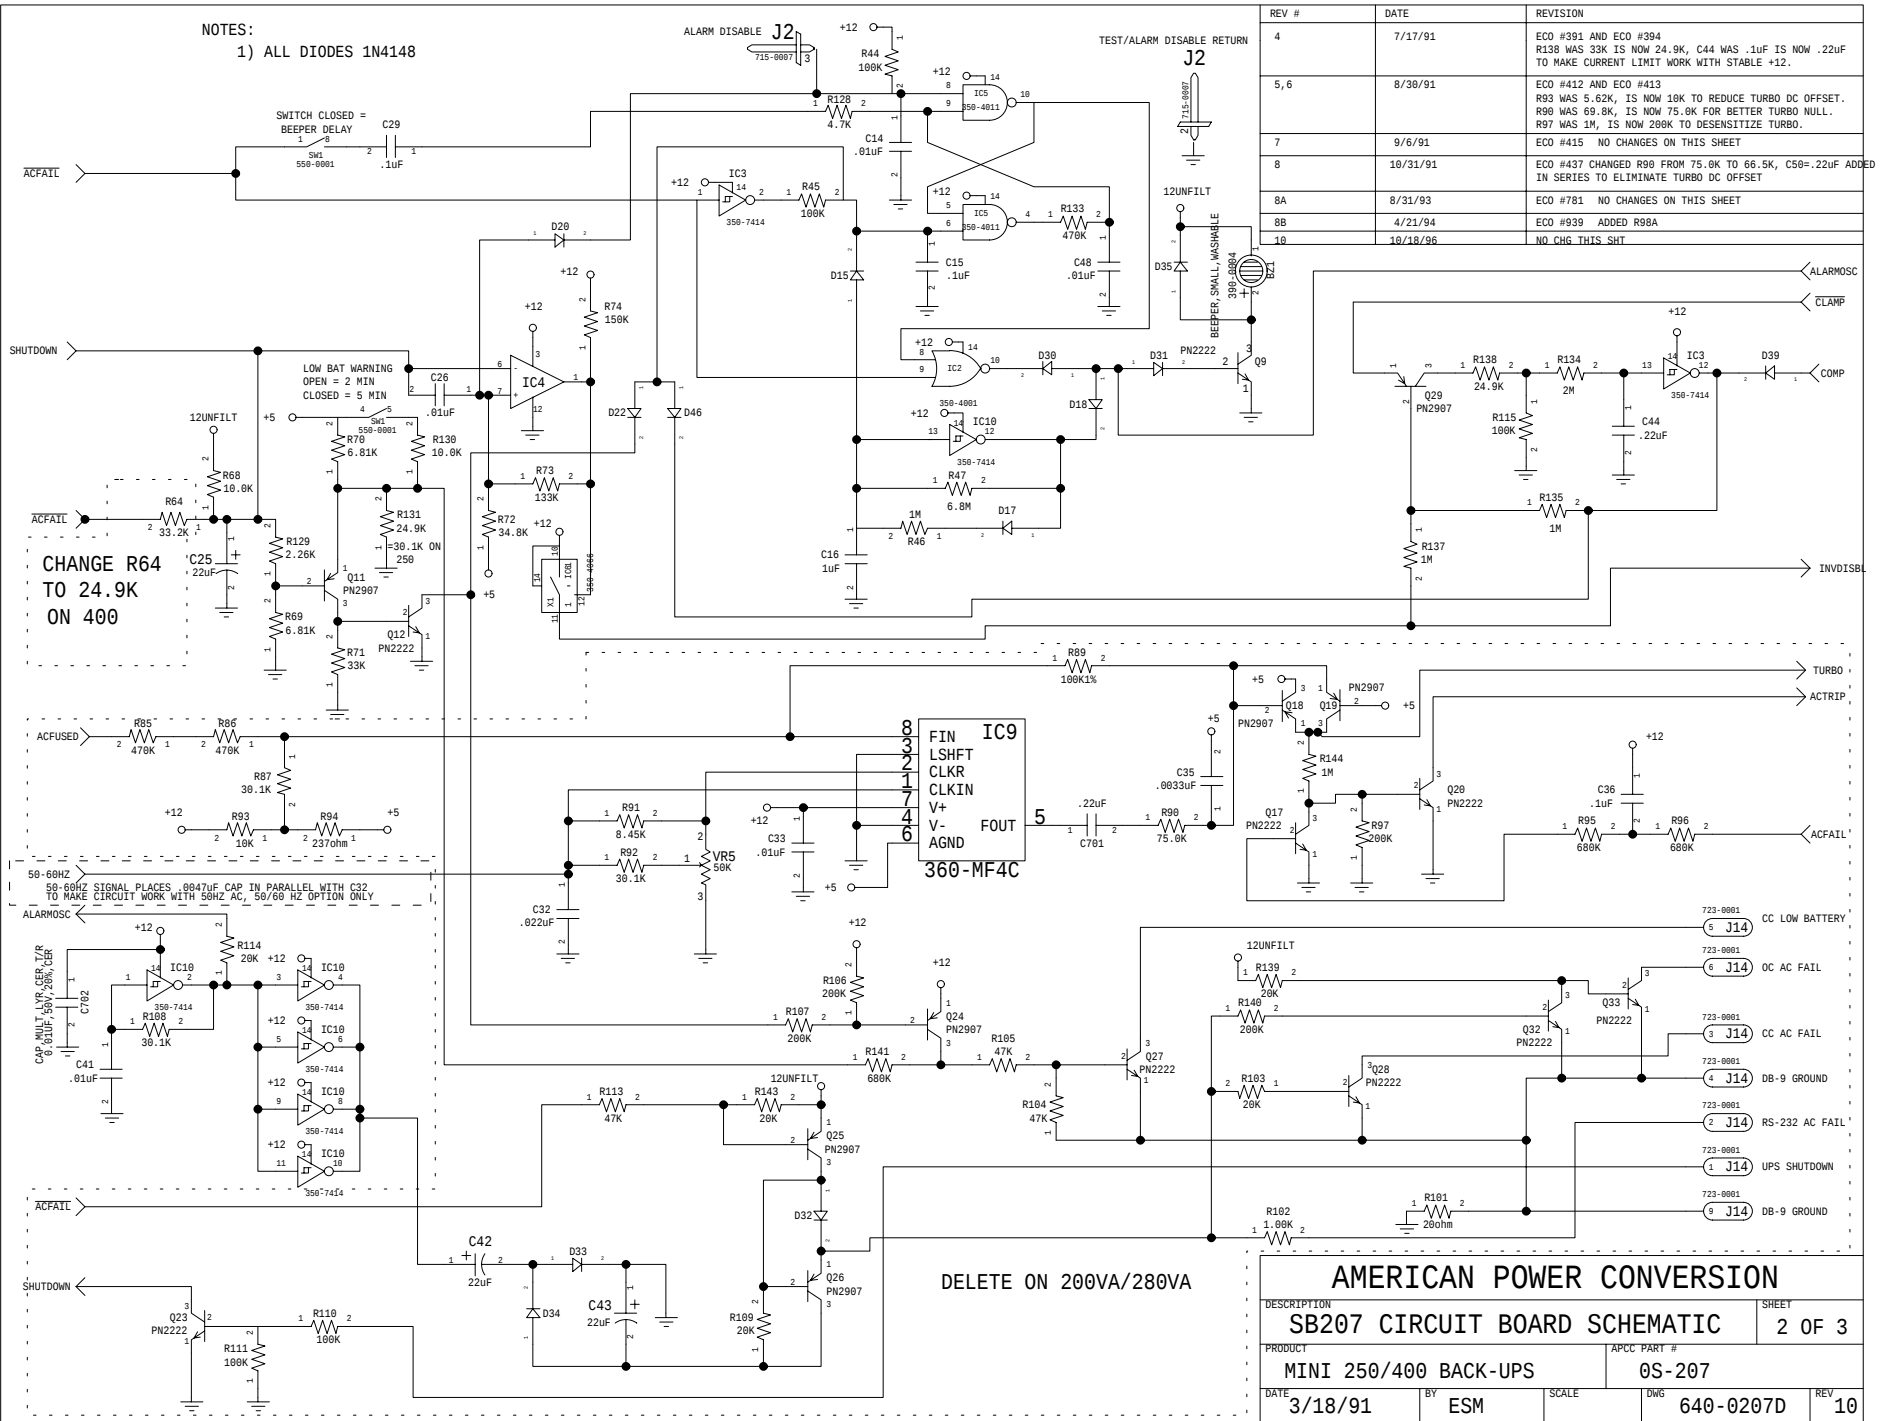

REV #	DATE	REVISION
4	7/17/91	ECO #391 AND ECO #394 R138 WAS 33K IS NOW 24.9K, C44 WAS .1uF IS NOW .22uF TO MAKE CURRENT LIMIT WORK WITH STABLE +12.
5,6	8/30/91	ECO #412 AND ECO #413 R93 WAS 5.62K, IS NOW 16K TO REDUCE TURBO DC OFFSET. R98 WAS 69.8K, IS NOW 75.8K FOR BETTER TURBO NULL. R97 WAS 1M, IS NOW 200K TO DESENSITIZE TURBO.
7	9/6/91	ECO #415 NO CHANGES ON THIS SHEET
8	10/31/91	ECO #437 CHANGED R98 FROM 75.8K TO 66.5K, C50=.22uF ADDED IN SERIES TO ELIMINATE TURBO DC OFFSET
8A	8/31/93	ECO #781 NO CHANGES ON THIS SHEET
8B	4/21/94	ECO #939 ADDED R98A
10	10/18/96	NO CHG THIS SHIT

AMERICAN POWER CONVERSION			
DESCRIPTION		SHEET	
SB207 CIRCUIT BOARD SCHEMATIC		2 OF 3	
PRODUCT		APCC PART #	
MINI 250/400 BACK-UPS		OS-207	
DATE	BY	SCALE	DWG
3/18/91	ESM		640-0207D
			REV
			10